

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 211 682 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
05.06.2002 Bulletin 2002/23

(51) Int Cl. 7: G11B 20/14, G11B 20/10,
G11B 27/30

(21) Application number: 01309755.5

(22) Date of filing: 20.11.2001

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• Kuribayashi, Hiroki, c/o Pioneer Corporation
Tsurugashima-shi, Saitama-ken (JP)
• Miyanabe, Shogo, c/o Pioneer Corporation
Tsurugashima-shi, Saitama-ken (JP)

(30) Priority: 28.11.2000 JP 2000361529

(74) Representative: Haley, Stephen et al
Gill Jennings & Every,
Broadgate House,
7 Eklon Street
London EC2M 7LH (GB)


(71) Applicant: Pioneer Corporation
Tokyo-to (JP)

(54) Data recording / reproduction method and apparatus using random series for scrambling input data

(57) When the present invention is applied to a DVD recording apparatus, a data-frame generation circuit(1) puts input user data into frames and a scramble circuit (2) scramble the data using M-series, then an ECC block construction unit(3) constructs ECC blocks and a RLL (1, 7) modulation unit(4) performs RLL modulation to generate recording data. In addition, in the scramble circuit(2), a M-series generation circuit(21) generates a

preset M-series and a conversion circuit(22) selectively converts this M-series to different random series based on recording position data for the position on the disk, then an EXOR circuit(23) takes the exclusive OR of the input data and the converted random series to scramble the input data, making it possible to perform highly reliable scrambling with little correlation between pairs of adjacent tracks on the disk.

FIG. 1

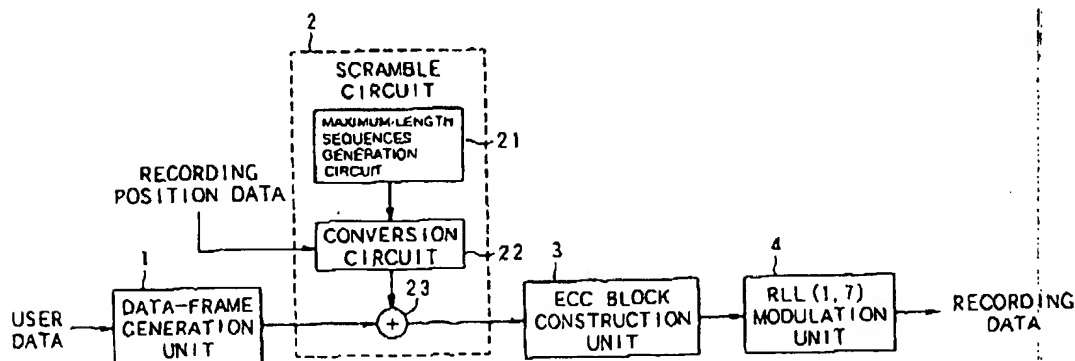

EP 1 211 682 A2

EP 1 211 682 A2

Description

[0001] The present invention relates to a data recording method of scrambling data and recording the scrambled data on a recording medium (and a data reproduction method of reading the scrambled data from the recording medium and descrambling it in order to reproduce data), and particularly to a data recording method that performs scrambling based on random Sequences which has a maximum period generated in same shift register stages, as explained about FIG. 6 (hereinafter, referred to as Maximum-length sequences).

[0002] In recent years, DVD has spread and advanced as a kind of large-volume recording medium, and the Differential Phase Detection (DPD) method has been adopted for the tracking servo. This DPD method detects the diagonal partial sum of the light intensity distribution of a 4-division photo detector and generates a tracking signal based on the respective phase differences. Generally, when a track on a disk that is being tracked by the DPD method has the same bit pattern as the adjacent tracks, or in other words, when there is correlation of the bit patterns, it is not possible to obtain a correct tracking-error signal. Therefore, in order to obtain an accurate tracking servo for the DPD method, user data are scrambled at random and recorded on a disk such that adjacent tracks do not have identical bit patterns. At the time of scrambling, by using different scrambling methods for three adjacent tracks on the disk in order to remove any correlation among the bit patterns of each track, it is possible to avoid the aforementioned problem and obtain a proper tracking-error signal.

[0003] FIG. 14 is a block diagram showing the construction of the scramble circuit for performing the scrambling described above. The scramble circuit shown in FIG. 14 comprises an initial-value generator circuit 201, Maximum-length sequences generator circuit 202 having a shift register 203 and EXOR circuit 204, and an EXOR circuit 205. The Maximum-length sequences generator circuit 202 shown in FIG. 14 is an example of using a 15-stage (R_0 to R_{14}) shift register 203, where bits are shifted in the sequential shift direction from each stage, and the EXOR circuit 204 takes the exclusive OR of the bits output from specified stages (R_{10} and R_{14} in FIG. 14) of the shift register 203, and feeds it back to the initial stage R_0 . By doing this, the Maximum-length sequences generator circuit 202 generates Maximum-length sequences that is random data having a period of $2^{15} - 1$ (bits).

[0004] On the other hand, the initial-value generator circuit 201, prepares in advance a plurality of partial series that appear during the Maximum-length sequences period as initial values based on the data for the recording position on the disk, and from these values, sets an initial value, which is selected based on the data for the recording position on the disk, for the Maximum-length sequences generator circuit 202. The initial-value generator circuit 201 switches the initial value in this way, so it is possible to perform different scrambling according to the recording position. Also, the EXOR circuit 205 scrambles the user data by taking the exclusive OR of the bit output from a specified stage of the shift register 203 (R_0 in FIG. 14) and the user data, and outputs that data to the outside as scrambled data.

[0005] However, in a scramble circuit that is constructed as shown in FIG. 14, a certain amount of correlation among adjacent tracks on the disk is generated even when a plurality of scrambling methods are applied according to the recording position on the disk. In other words, for a pair of adjacent tracks on a disk, depending on the modulation method for the recording data, there is a high possibility that the same Maximum-length sequences pattern will be used for comparatively close positions on the disk, so it is difficult to completely remove any correlation by just switching among initial values of specific Maximum-length sequences.

[0006] On the other hand, by preparing a plurality of Maximum-length sequences in advance, which correspond to the plurality of scrambling methods, instead of switching among specified Maximum-length sequences initial values as shown in FIG. 14, it is possible to switch the Maximum-length sequences based on the data for the recording position on the disk. However, in this case, the construction required for generating a plurality of Maximum-length sequences becomes difficult and the size of the circuit becomes large.

[0007] In consideration of the problems described above, it is the objective of this invention to provide a data recording method and apparatus that generates a plurality of random series based on specific Maximum-length sequences and then selectively performs scrambling based on those random series such that there is no correlation among the recording positions, and such that highly reliable scrambling is possible with a small scale circuit.

[0008] The above object of the present invention can be achieved by the data recording method of the present invention of using random series to scramble input data and generate recording data. The method is provided with: a random series generation process of generating a pre-determined random series; a random series conversion process of selectively converting said random series to different random series based on recording position data; and a scrambling process of using said converted random series to scramble input data.

[0009] According to the present invention, when generating recording data, a fixed specific generated random series or Maximum-length sequences is selectively converted based on the recording position data, so it is possible to perform scrambling using different random series when the recording positions are close to each other. In addition, since only one of the Maximum-length sequences that were prepared in advance needs to be used, construction is simple, and it is possible to perform scrambling with higher reliability than when changing the initial value of the Maximum-length sequences.

EP 1 211 682 A2

[0010] In one aspect of the present invention, said random series conversion process converts said random series to different random series by performing interleaving on said random series by rearranging the bit order of the output bits of said random series based on said recording position data.

[0011] According to this aspect, when generating recording data, interleaving is performed based on recording position data for a fixed specific generated random series or Maximum-length sequences to rearrange the bit order, so it is possible to arbitrarily change the original Maximum-length sequences pattern and to easily and accurately convert the Maximum-length sequences.

[0012] In another aspect of the present invention, said random series conversion process converts said random series to different random series by inverting the bits of said random series according to an inverted pattern based on said recording position data.

[0013] According to this aspect, when generating recording data, bit inversion is performed according to an inverted pattern that is based on the recording position data for a fixed specifically generated random series or Maximum-length sequences, so it is possible to arbitrarily change the original Maximum-length sequences pattern and to easily and accurately convert the Maximum-length sequences.

[0014] In further aspect of the present invention, said random series conversion process performs interleaving on said random series by rearranging the bit order of the output bits of said random series based on said recording position data, and then performs a specified calculation on the interleaved random series and delayed output of that random series and converts said random series to different random series based on the results of the performed calculation.

[0015] According to this aspect, the described delayed output of the random Maximum-length sequences that was interleaved as described above is obtained and calculation is performed, so it is possible to perform scrambling using a highly reliable random series having even more reduced correlation.

[0016] In further aspect of the present invention, said random series conversion process performs said interleaving on a 16-bit random series, then alternately selects and outputs the high-order 8 bits or low-order 8 bits.

[0017] According to this aspect, the original random Maximum-length sequences is configured with 16 bits, and the random series that was converted by interleaving is output by alternating the high-order 8 bits and low-order 8 bits, so it is possible to keep the original Maximum-length sequences as is and scramble the input data in 1-byte units, making it easier to handle the data.

[0018] In further aspect of the present invention, said recording data are recorded in order on tracks on a disk-shaped medium, and in said random series conversion process are converted to different random series for adjacent tracks.

[0019] According to this aspect, when recording the scrambled recording data on a disk-shaped recording medium, the scrambling process is performed as described above so it is possible to perform effective scrambling of data on a general-purpose recording medium, such as a DVD, and thus increase reliability.

[0020] The above object of the present invention can be achieved by the data recording apparatus of the present invention of using random series to scramble input data and generate recording data. The data recording apparatus is provided with: a random series generation device of generating a pre-determined random series; a random series conversion device of selectively converting said random series to different random series based on recording position data; and a scrambling device of using said converted random series to scramble input data.

[0021] According to the present invention, when generating recording data, a fixed specific generated random series or Maximum-length sequences is selectively converted based on the recording position data, so it is possible to perform scrambling using different random series when the recording positions are close to each other. In addition, since only one of the Maximum-length sequences that were prepared in advance needs to be used, construction is simple, and it is possible to perform scrambling with higher reliability than when changing the initial value of the Maximum-length sequences.

[0022] In one aspect of the present invention, said random series conversion device includes an interleaving device of rearranging the order of the output bits of said random series based on said recording position data, and converts said random series to different random series by performing interleaving on said random series by said interleaving device.

[0023] According to this aspect, when generating recording data, interleaving is performed based on recording position data for a fixed specific generated random series or Maximum-length sequences to rearrange the bit order, so it is possible to arbitrarily change the original Maximum-length sequences pattern and to easily and accurately convert the Maximum-length sequences.

[0024] In another aspect of the present invention, said random series conversion device includes a bit inversion device of inverting bits according to an inverted pattern based on said recording position data, and converts said random series to different random series by inverting the bits of said random series by said bit inversion device.

[0025] According to this aspect, when generating recording data, bit inversion is performed according to an inverted pattern that is based on the recording position data for a fixed specifically generated random series or Maximum-length sequences, so it is possible to arbitrarily change the original Maximum-length sequences pattern and to easily and accurately convert the Maximum-length sequences.

EP 1 211 682 A2

[0026] In further aspect of the present invention, said random series conversion device includes an interleaving device of rearranging the order of the output bits of said random series based on said recording position data, a delay device of generating delayed output of the random series after interleaving has been performed, and a calculation device of performing a specified calculation on the random series that is interleaved by said interleaving device and the delayed output of said delay device, and performs conversion based on the calculation results.

[0027] According to this aspect, the described delayed output of the random Maximum-length sequences that was interleaved as described above is obtained and calculation is performed, so it is possible to perform scrambling using a highly reliable random series having even more reduced correlation.

[0028] In further aspect of the present invention, said random series conversion device includes a selective output device of alternately selecting the higher-order 8 bits or lower-order 8 bits after interleaving was performed on a 16-bit random series by said interleaving device.

[0029] According to this aspect, the original random Maximum-length sequences is configured with 16 bits, and the random series that was converted by interleaving is output by alternating the high-order 8 bits and low-order 8 bits, so it is possible to keep the original Maximum-length sequences as is and scramble the input data in 1-byte units, making it easier to handle the data.

[0030] In further aspect of the present invention, said recording data are recorded in order on the tracks of a disk-shaped recording medium, and said random series conversion device converts said random series to different random series for adjacent tracks.

[0031] According to this aspect, when recording the scrambled recording data on a disk-shaped recording medium, the scrambling process is performed as described above so it is possible to perform effective scrambling of data on a general-purpose recording medium, such as a DVD, and thus increase reliability.

[0032] The above object of the present invention can be achieved by the data recording method of the present invention for descrambling input data by using a random series which generates reproduction data by using the random series that were selected during scrambling to descramble said input data, which were scrambled by the data recording method.

[0033] According to the present invention, on the data reproduction side, it is possible to perform descrambling using the same construction as scrambling that is performed on the data recording side, where the random series that were selected during the scrambling process are determined, and the input data are descrambled with these Maximum-length sequences. Therefore, in a system of recording and reproducing data with this kind of combination of scrambling and descrambling, highly reliable processing is possible.

[0034] The above object of the present invention can be achieved by the data recording apparatus of the present invention for descrambling input data by using a random series which generates reproduction data by using the random series that were selected during scrambling to descramble said input data, which were scrambled by the data recording method.

[0035] According to the present invention, on the data reproduction side, it is possible to perform descrambling using the same construction as scrambling that is performed on the data recording side, where the random series that were selected during the scrambling process are determined, and the input data are descrambled with these Maximum-length sequences. Therefore, in a system of recording and reproducing data with this kind of combination of scrambling and descrambling, highly reliable processing is possible.

IN THE DRAWINGS

[0036]

FIG. 1 is a block diagram of the major construction of a DVD recording apparatus used as the data recording apparatus of an embodiment of the present invention;

FIG. 2 is a diagram showing the data configuration of a data frame;

FIG. 3 is a diagram showing the data configuration of an ECC block;

FIG. 4 is a diagram showing the track configuration of a DVD disk used as the recording medium;

FIG. 5 is a diagram showing the method of assigning scrambling corresponding to scramble Nos. 0 to 15 for each ECC block recorded on the tracks of the DVD disk;

FIG. 6 is a diagram explaining the theory of a scrambling process that uses Maximum-length sequences;

FIG. 7 is a block diagram showing a first example of the construction of a conversion circuit;

FIG. 8 is a diagram showing an example of the data configuration of the interleave pattern of an interleave circuit;

FIG. 9 is a block diagram showing a second example of the construction of a conversion circuit;

FIG. 10 is a diagram showing an example of the data configuration of the inverted pattern of the inverted-pattern-generation unit;

FIG. 11 is a block diagram showing a third example of the construction of a conversion circuit;

EP 1 211 682 A2

FIG. 12 is a block diagram of an additional circuit that is more generalized than the additional circuit in the conversion circuit of the third example of construction ;

FIG. 13 is a block diagram showing an example of changes to the construction shown in FIG. 1 ; and

FIG. 14 is a block diagram showing the construction of a conventional scramble circuit

[0037] The preferred embodiment of this invention will be explained with reference to the drawings. Here, an embodiment of using a data frame and ECC block configuration of DVD format is explained in which RLL (1, 7) modulation is used instead of 8/16 modulation for encoding, and where in the data recording method of recording data, the recording data are scrambled based on random Maximum-length sequences.

[0038] FIG. 1 is a block diagram of the major construction of a DVD recording apparatus used as the data recording apparatus of this embodiment of the present invention. The elements of the construction shown in FIG. 1 include a data frame generation unit 1, scramble circuit 2, ECC block construction unit 3, and RLL (1, 7) modulation unit 4. In addition, the scramble circuit 2 comprises Maximum-length sequences generation circuit 21, conversion circuit 22 and EXOR circuit 23.

[0039] In FIG. 1, the user data that are input to the DVD recording apparatus are added in 2-kByte units to the ID (Identification Data) and EDC (Error Detection Code) by the data frame generation unit 1 to form a data frame. The data configuration used here is shown in FIG. 2. In FIG. 2, the 12-byte ID at the start of the data frame contains unique address data for the location on the disk, which is continuously increased. Also, the 4-byte EDC at the end of the data frame is specified code that is used in the error correction process. The user data are located between the ID and EDC to form a data frame having data configuration of 172 bytes x 12 rows.

[0040] Next, the scramble circuit 2 scrambles the data frame. First, the Maximum-length sequences generation circuit 21 generates Maximum-length sequences as the random series to be used in scrambling. Moreover, the conversion circuit 22 converts the Maximum-length sequences from the Maximum-length sequences generation circuit 21 as will be described later, and outputs different random series depending on the recording position data for the disk. When doing this, the Maximum-length sequences is converted by changing the order of the output bits of the Maximum-length sequences in the pattern based on the recording position data, and variations of random series are obtained according to just the type of recording position data. The construction and operation of the conversion circuit 22 will be described in detail later.

[0041] Next, the EXOR circuit 23 takes the exclusive OR of the user data in the data frame and Maximum-length sequences that was converted by the conversion circuit 22, and outputs the scrambled data frame. A detailed explanation of the construction and function of the scramble circuit 2 will be given later.

[0042] Next, in the ECC block construction unit 3, error correction code is added to the sixteen data frames that were scrambled as described above to form an ECC block. The data configuration of the ECC block is shown in FIG. 3. The error correction code (parity) shown in FIG. 3 is added to 172 bytes x 192 rows of data in which sixteen data frames, which have the data configuration shown in FIG. 2, have been arranged. In other words, a 16-byte PO (Outer-code Parity) is added to the 192 bytes in the vertical direction, and a 10-byte PI (Inner-code parity) is added to the 172 bytes in the horizontal direction. Overall, an ECC block that is 182 bytes x 208 rows is constructed.

[0043] Finally, in the RLL (1, 7) modulation unit 4, RLL (1, 7) modulation is performed on the ECC block. RLL (1, 7) modulation is a type of RLL (Run Length Limited Code), and in addition to being a method of modulating the 2-bit original code to 3-bit code, it is a recording method in which the minimum inversion interval during recording is limited to 2T (T is the channel-bit period) by NRZI (Non-Return to Zero Inverse), and the maximum inversion interval is limited to 8T. The RLL (1, 7) modulation method has various advantages in that by combining it with Viterbi decoding, it is possible to increase the linear recording density, simplify the modulator-demodulator circuit, and use a low-frequency channel clock.

[0044] Next, FIG. 4 and FIG. 5 will be used to explain in detail the data recording method of this embodiment, which is the method of setting the sixteen scrambling methods that correspond to the disk position data as described above.

FIG. 4 is a diagram showing the track configuration of a DVD disk 5 used as the recording medium. Spiral-shaped tracks are formed on the DVD disk 5 from the inside to the outside. In FIG. 4, track numbers are given to the tracks on the DVD disk 5 for each revolution of the disk starting from the inside (the three tracks in FIG. 4 are indicated by tr. n to tr. n+2). Moreover, FIG. 5 is a diagram showing the method of assigning scrambling corresponding to scramble No. 0 to 15 (indicated as scr0 to scr15 in FIG. 5) for each ECC block recorded on the tracks of the DVD disk 5.

[0045] For the DVD disk 5, the Constant Linear Velocity (CLV) method is adopted as the recording method for recording data at a constant linear speed. Therefore, as shown in FIG. 5, depending on the radius of the recording position of the DVD disk, the number of ECC blocks per one track circumference (one track number in FIG. 5) differs. With the arrangement shown in FIG. 5, when the sixteen scramble numbers are assigned in order to the ECC blocks, the same type of scrambling is not used for adjacent track pairs, as will be explained below.

[0046] To show the relationship between the position of the tracks on the DVD disk 5 and the ECC blocks, FIG. 5A shows an example near the inside of the disk, and FIG. 5B shows an example near the outside of the disk. In the case

EP 1 211 682 A2

of FIG. 5A, two ECC blocks are located on one track, and in the case of FIG. 5B, five ECC blocks are located on one track. In either case, it can be seen that the scramble number never becomes the same between the adjacent three tracks n to $n+2$. Generally, as a condition that different scramble numbers are set for pairs of adjacent tracks, of the sixteen scramble numbers, there must be one or more ECC block located on each track, and there must be 15 ECC blocks or less located on every two tracks (7.5 blocks per track or less).

[0047] Here, the number of ECC blocks per track in the DVD format is approximately 1.8 blocks for the inner most track of the DVD disk 5 and approximately 4.4 blocks for the outer most track of the DVD 5. By satisfying the aforementioned conditions, it is possible to always set different scramble numbers from among the sixteen scramble numbers for three adjacent tracks.

[0048] Next, FIG. 6 will be used to explain the theory of the scrambling process that uses the Maximum-length sequences. Generally, in order to generate Maximum-length sequences with a circuit, a multi-stage linear feedback shift register can be constructed. In other words, as shown in FIG. 6, the circuit can be constructed by arranging an n -stage shift register indicated by R_0 to R_{n-1} , coefficients h_1 to h_{n-1} that correspond to the amount of feedback of each stage, and exclusive OR EX1 to EX $n-1$. Here, various Maximum-length sequences are possible by adequately setting coefficients h_0 to h_{n-1} to the output bits (x^1 to x^{n-1}) of each stage of the shift register. The construction shown in FIG. 6 can be expressed by the following polynomial $H(x)$.

$$H(x) = x^n + h_{n-1}x^{n-1} + h_{n-2}x^{n-2} + \dots + h_2x^2 + h_1x^1 + 1 \quad (1)$$

[0049] The polynomial $H(x)$ given in Equation (1) is selected as the primitive polynomial, and by performing calculation based on this, it is possible to generate Maximum-length sequences. The Maximum-length sequences expressed by an n -degree polynomial $H(x)$ has a period $2^n - 1$, and identical data are not repeated in the series output during this period.

[0050] As the method of setting the coefficients h_0 to h_{n-1} shown in FIG. 6, by making the feedback bit 1 and the non-feedback bit 0, for example, it is possible to set various Maximum-length sequences with this combination. The output series of the Maximum-length sequences can be obtained from any of the stages R_0 to R_{n-1} , and can be obtained also as parallel data in addition to serial data. Here, user data on the DVD disk 5 is handled in 2-kByte units, so the case of Maximum-length sequences with a 2-kByte period that corresponds to scrambling of user data will be explained. In this case, Maximum-length sequences generation circuit 21 is constructed that uses Maximum-length sequences that correspond to the 14-degree primitive polynomial of Equation (1) to give a period of approximately 2 Kbytes ($2^{14} - 1 = 2047$). However, in this embodiment, there is a conversion circuit 22, so it is possible to use Maximum-length sequences with a shorter period.

[0051] Next, FIG. 7 is a block diagram showing a first example of the construction of the conversion circuit 22 of this embodiment. The first example that is shown in FIG. 7 is a conversion circuit 22 that comprises a 16-stage shift register 101, an interleave circuit 102, a flip-flop 103, a selector 104 and a timing-control unit 105.

[0052] In FIG. 7, the shift register 101 has 16 stages that are indicated as R_0 to R_{15} , and the Maximum-length sequences that was output from the Maximum-length sequences generation circuit 21 is input as serial data for every 1 bit, and the shift register 101 shifts the bits in order in the shift direction shown by the arrow (from R_0 toward R_{15}). In addition, the shift register 101 outputs the 1-bit parallel data, which is made up from the output bits from each stage R_0 to R_{15} of the shift register 101, to the interleave circuit 102.

[0053] The interleave circuit 102 rearranges the order of the bits that are output from the stages R_0 to R_{15} of the shift register each time a 16-bit shift is performed by the shift register 101, and then outputs the interleaved 16 output bits to the stages Q_0 to Q_{15} of the flip-flop 103. In other words, Maximum-length sequences that are input to the shift register are converted to different random series by the interleave circuit 102. When doing this, it is possible to set a plurality of interleave patterns for the interleave circuit 102 (for example, constructing a data table in the memory), and specific interleave patterns are selected that correspond to the scramble numbers that are determined according to the recording position data.

[0054] The relationship between the interleave pattern in the interleave circuit 102 and the scramble number will be explained here. The interleave circuit 102 performs interleaving according to the following equation between the i th output bit a_i from the shift register 101 and the k th output bit b_k from the interleave circuit 102.

$$b_k = a_j$$

$$j = [Sn + (Sn \times 2 + 1) \times k \times (k + 1)/2] \bmod 16 \quad (2)$$

EP 1 211 682 A2

where:

Sn: Scramble number
Mod16: Finds Modulo 16.

[0055] Interleaving is performed for the Maximum-length sequences by performing the calculation of Equation (2) for each of the output bits $j = 1$ to 16. Also, since calculation of Equation (2) changes for different scramble numbers, different interleave patterns are obtained.

[0056] Next, the flip-flop 103 has 16 stages that are indicated by Q_0 to Q_{15} , and parallel data are input from the interleave circuit 102 and held in each of these stages Q_0 to Q_{15} . The timing-control unit 105 supplies a load signal to the flip-flop 103, and when this signal is received, the output bits that are held in the stages Q_0 to Q_{15} are output to the selector 104 8 bits at a time as will be explained later.

[0057] The selector 104 divides the 16-bit parallel data that are output from the flip-flop 103 into 8 high-order bits and 8 low-order bits, and outputs one or the other in 1-byte units. The timing-control unit 105 supplies a H/L selection signal to the selector 104 for switching the order of the 8 high-order bits and 8 low-order bits of the output data from the selector 104 according to the H/L selection signal.

[0058] The timing-control unit 105 generates a load signal and the H/L selection signal mentioned above according to a reference clock. When doing this, the timing-control unit 105 counts the number of bits of the Maximum-length sequences input to the shift register 101, and changes the pattern for the load signal every 16 bits, and for the H/L selection signal every 8 bits.

[0059] The Maximum-length sequences is converted by the conversion circuit 22 in this way, and the 8-bit output data are output from the selector 104 to the EXOR circuit 23. The EXOR circuit 23, scrambles the user data by a random series after conversion, as described above, and outputs the scrambled data.

[0060] In the EXOR circuit 23 shown in FIG. 7, processing is performed in 1-byte (8 bits) units, and the output data and user data from the selector 104 are input as 8-bit wide parallel data. However, this construction is not necessary and construction in which the output bits from each stage Q_0 to Q_{15} of the flip-flop 103 are supplied one bit at a time to the EXOR circuit 23 as serial data, and calculation is performed with the user data in 1-bit units is also possible. Moreover, construction in which all of the output bits from each stage Q_0 to Q_{15} of the flip-flop 103 are supplied at one time to the EXOR circuit 23, and calculation is performed in the EXOR circuit 23 for pairs of 16-bit wide parallel data is also possible.

[0061] FIG. 8 is a diagram showing an example of the data configuration of the interleave pattern of the interleave circuit 102. The interleave pattern shown in FIG. 8 contains the connection relationship for the output bits from the stages R_0 to R_{15} of the shift register 101 on the input side and for the stages Q_0 to Q_{15} of the flip-flop 103 on the output side as setting data. In addition, it contains 16 setting data items for the scramble numbers 0 to 15, and since a different connection relationship is set for each, it is possible to selectively generate 16 different random series from the input Maximum-length sequences.

[0062] FIG. 9 is a block diagram showing a second example of the construction of the conversion circuit 22 of this embodiment. The conversion circuit 22 of the second example shown in FIG. 9 comprises an 8-stage shift register 111, inverted-pattern generation unit 112 and EXOR circuit 113.

[0063] In FIG. 9, the shift register 111 has 8 stages that are indicated as R_0 to R_7 , and it shifts the bits of the Maximum-length sequences, which was output from the Maximum-length sequences generation circuit 21 and inputs one bit at a time as serial data, in order in the shift direction shown by the arrow (direction from R_0 to R_7). Then, it outputs the 8-bit parallel data, which is formed from the output bits of the stages R_0 to R_7 of the shift register 111, to the EXOR circuit 113.

[0064] The inverted-pattern generation unit 112 generates an 8-bit inverted pattern for inverting the output bits from the stages R_0 to R_7 of the shift register 111, and outputs the inverted pattern to the EXOR circuit 113. For example, the inverted pattern is constructed such that of the output bits, the bits to be inverted are '1' and the bits not to be inverted are '0'. At this time it is possible for the inverted-pattern generation unit 112 to generate a plurality of inverted patterns and select specified inverted patterns to match the aforementioned scramble numbers.

[0065] The EXOR circuit 113 takes the exclusive OR of the 8-bit parallel data from the shift register 111 and the 8-bit inverted data from the inverted-pattern generation unit 112, and generates 8-bit output data of which the bit pattern of the stages R_0 to R_7 of the shift register 111 is inverted.

[0066] FIG. 10 is a diagram showing an example of the data configuration of the inverted pattern of the inverted-pattern-generation unit 112. The inverted pattern shown in FIG. 10 contains 16 setting data items for scramble numbers 0 to 15. The setting data for each scramble number are each a different inverted pattern, so it is possible to selectively generate 16 different random series from the input Maximum-length sequences.

[0067] Taking into consideration conformity with the first example of construction shown in FIG. 7, the construction of the second example shown in FIG. 9 is such that the Maximum-length sequences that is input from the Maximum-

EP 1 211 682 A2

length sequences generation circuit 22 as serial data is converted to 8-bit parallel data. However, the construction is not limited to this, and construction in which the Maximum-length sequences from the Maximum-length sequences generation circuit 21 is obtained as 8-bit parallel data is also possible. Moreover, similar to the example shown in FIG. 7, in the case of the example shown in FIG. 9, calculation is not limited to 1-byte units, and can be performed using a suitable data width such as 1-bit or 2-bytes.

[0068] Next, FIG. 11 is a block diagram showing a third example of the construction of the conversion circuit 22 of this embodiment. The conversion circuit 22 of the third example of construction shown in FIG. 11, comprises an additional circuit 106 for reducing the correlation among Maximum-length sequences in addition to a shift register 101, interleave circuit 102, flip-flop 103, selector 104 and timing-control unit 105, which are similar to those shown in FIG. 7.

[0069] As shown in FIG. 11, the additional circuit 106 in the third example of construction comprises a mod256 adding circuit 107 and delay element 108. In this construction, the mod256 adding circuit 107 performs mod256 addition (adds and finds Modulo 256) of the high-order bits or low-order bits that are output from the selector 104 and the 8 bits that are output from the delay element 108, and outputs the resulting 8-bit output data to the EXOR circuit 23. On the other hand, the output data from the mod256 adding circuit 107 is held by the delay element 108 and used for the next calculation. The delay element 108 is not set at the beginning of scrambling, so the timing-control unit 105 supplies a reset signal to the delay element 108 at the start of scrambling and resets the held data.

[0070] By using the additional circuit 106 shown in FIG. 11 in this way, changes in the random series that are based on the function of the interleave circuit 102 affect the generation of the random series from the delay element 108, so changes in the random series become larger. In other words, the correlation between random series that are close to each other time wise is reduced. Therefore, in comparison with the first example of construction shown in FIG. 9, the third example shown in FIG. 11 uses a random series with lower correlation, so it is possible to perform more reliable scrambling.

[0071] Also, in the third example of construction shown in FIG. 11, processing is not limited to 1-byte units, so construction in which processing is performed using a suitable data width, such as 1 bit or 2 bytes, is possible. In this case, when the data width is 1 bit, the mod256 adding circuit 107 of the additional circuit 106 performs exclusive OR calculation, and when the data width is n bits, it performs addition and finds Modulo 2^n .

[0072] Next, FIG. 12 is a block diagram of an additional circuit that is more generalized than the additional circuit 106 of the conversion circuit 22 in the third example of construction. As shown in FIG. 12, this generalized additional circuit 30 comprises a calculation unit 301 and a plurality of delay elements 302. The calculation unit 301 is not limited to mod256 addition as described above, and in addition to calculating the exclusive OR between the input data and past calculation results it performs various calculations. Moreover, the plurality of delay elements 302 hold the past calculation results from the calculation unit 301 for a specified period of time. By performing calculation using the input data and past calculation results in this way, the calculation unit 301 affects the generation of random series and is very effective in reducing the correlation between converted random series.

[0073] Taking into consideration conformity with the first example of construction shown in FIG. 7, the construction of the third as well is such that the Maximum-length sequences that are input from the Maximum-length sequences generation circuit 21 as serial data are converted to 8-bit parallel data. However, the construction is not limited to this, and construction in which the Maximum-length sequences from the Maximum-length sequences generation circuit 21 is obtained as 8-bit parallel data is also possible. Moreover, similar to the example shown in FIG. 7, in the case of the example shown in FIG. 11, calculation is not limited to 1-byte units, and can be performed using a suitable data width such as 1-bit or 2-bytes.

[0074] A first, second and third example of construction have been explained, however it is also possible to use combinations of these examples. For example, it is possible to perform conversion according to the construction shown in FIG. 9 on the random series that have been already converted by the construction shown in FIG. 7. Also, in contrast, it is possible to perform conversion according to the construction shown in FIG. 7 on the random series that have already been converted by the construction shown in FIG. 9. Furthermore, the additional circuit 106 in the third example of construction, or the more generalized additional circuit 30 shown in FIG. 12, which is combined with the third example of construction, can be used in combination with the first example of construction.

[0075] With the embodiment of the present invention described above, a plurality of different random series are generated based on specified Maximum-length sequences that is set in advance, and scrambling is performed by using the different random series that correspond to recording positions on the DVD disk 5. Therefore, highly reliable scrambling with low correlation between adjacent tracks on the DVD disk 5 is possible. As a result, it is possible to obtain an accurate tracking-error signal even when using a tracking servo according to the DPD method. With the construction of this embodiment, only one Maximum-length sequences needs to be prepared in advance so it is not necessary to greatly increase the size of the circuitry.

[0076] In the embodiment described above, the major construction shown in FIG. 1 can be changed as shown in FIG. 13. In other words, in the scramble circuit 2 in FIG. 13, after the Maximum-length sequences generation circuit 21 generates an Maximum-length sequences, the EXOR circuit 23 takes the exclusive OR with the user data, then the

EP 1 211 682 A2

calculation results are converted by the conversion circuit 22 and the output data are output to the ECC block construction unit 3. This kind of construction also makes it possible to scramble the user data in the same way as scrambling by the construction shown in FIG. 1.

[0077] Also, in this embodiment, applying the present invention to a data recording method of recording data using a DVD formatted data frame and ECC block construction, and using an RLL (1, 7) modulation method instead of 8/16 modulation was explained, however it is also possible to apply the present invention to other formats as long as scrambling is performed based on Maximum-length sequences.

[0078] Moreover, in this embodiment, applying the present invention to a data recording method that performs scrambling was explained, however, by using the same construction, it is also possible to apply the present invention to a data reproduction method that performs descrambling. When performing descrambling that corresponds to the construction shown in FIG. 13, the interleave circuit 102 shown in FIG. 7 must have a de-interleave circuit that returns the order of the output bits to the original order.

15 Claims

1. A data recording method of using random series to scramble input data and generate recording data, characterized in that the method comprises:

a random series generation process (21) of generating a pre-determined random series;
a random series conversion process (22) of selectively converting said random series to different random series based on recording position data, and
a scrambling process (23) of using said converted random series to scramble input data.

2. The data recording method according to claim 1, wherein said random series conversion process (22) converts said random series to different random series by performing interleaving on said random series by rearranging the bit order of the output bits of said random series based on said recording position data.

3. The data recording method according to claim 1, wherein said random series conversion process (22) converts said random series to different random series by inverting the bits of said random series according to an inverted pattern based on said recording position data.

4. The data recording method according to claim 1, wherein said random series conversion process (22) performs interleaving on said random series by rearranging the bit order of the output bits of said random series based on said recording position data, and then performs a specified calculation on the interleaved random series and delayed output of that random series and converts said random series to different random series based on the results of the performed calculation.

5. The data recording method according to claim 2 or claim 4, wherein said random series conversion process (22) performs said interleaving on a 16-bit random series, then alternately selects and outputs the high-order 8 bits or low-order 8 bits.

6. The data recording method of any one of claims 1 to 5, wherein said recording data are recorded in order on tracks on a disk-shaped medium, and in said random series conversion process (22) are converted to different random series for adjacent tracks.

7. A data recording apparatus (2) that uses random series to scramble input data and generate recording data, characterized in that the apparatus comprises:

a random series generation device (21) of generating a pre-determined random series;
a random series conversion device (22) of selectively converting said random series to different random series based on recording position data, and
a scrambling device (23) of using said converted random series to scramble input data.


8. The data recording apparatus (2) according to claim 7, wherein said random series conversion device (22) includes an interleaving device (102) of rearranging the order of the output bits of said random series based on said recording position data, and converts said random series to different random series by performing interleaving on said random series by said interleaving device (102).

EP 1 211 682 A2

9. The data recording apparatus (2) according to claim 7 wherein said random series conversion device (22) includes a bit inversion device (112) of inverting bits according to an inverted pattern based on said recording position data, and converts said random series to different random series by inverting the bits of said random series by said bit inversion device (112).
10. The data recording apparatus (2) according to claim 7 wherein said random series conversion device (22) includes an interleaving device (102) of rearranging the order of the output bits of said random series based on said recording position data, a delay device (108) of generating delayed output of the random series after interleaving has been performed, and a calculation device (107) of performing a specified calculation on the random series that is interleaved by said interleaving device (102) and the delayed output of said delay means, and performs conversion based on the calculation results.
11. The data recording apparatus (2) according to claim 8 or 10, wherein said random series conversion device (22) includes a selective output device (104) of alternately selecting the higher-order 8 bits or lower-order 8 bits after interleaving was performed on a 16-bit random series by said interleaving device (102).
12. The data recording apparatus (2) according to any one of the claims 7 to 11, wherein said recording data are recorded in order on the tracks of a disk-shaped recording medium, and said random series conversion device (22) converts said random series to different random series for adjacent tracks.
13. A data reproduction method for descrambling input data by using a random series which;
generates reproduction data by using the random series that were selected during scrambling to descramble said input data, which were scrambled by any of the data recording methods according to any one of claims 1 to 6.
14. A data reproduction apparatus for descrambling input data by using a random series which;
generates reproduction data by using the random series that were selected during scrambling to descramble said input data, which were scrambled by any of the data recording methods according to any one of claims 1 to 6.

EP 1 211 682 A2

FIG. 1

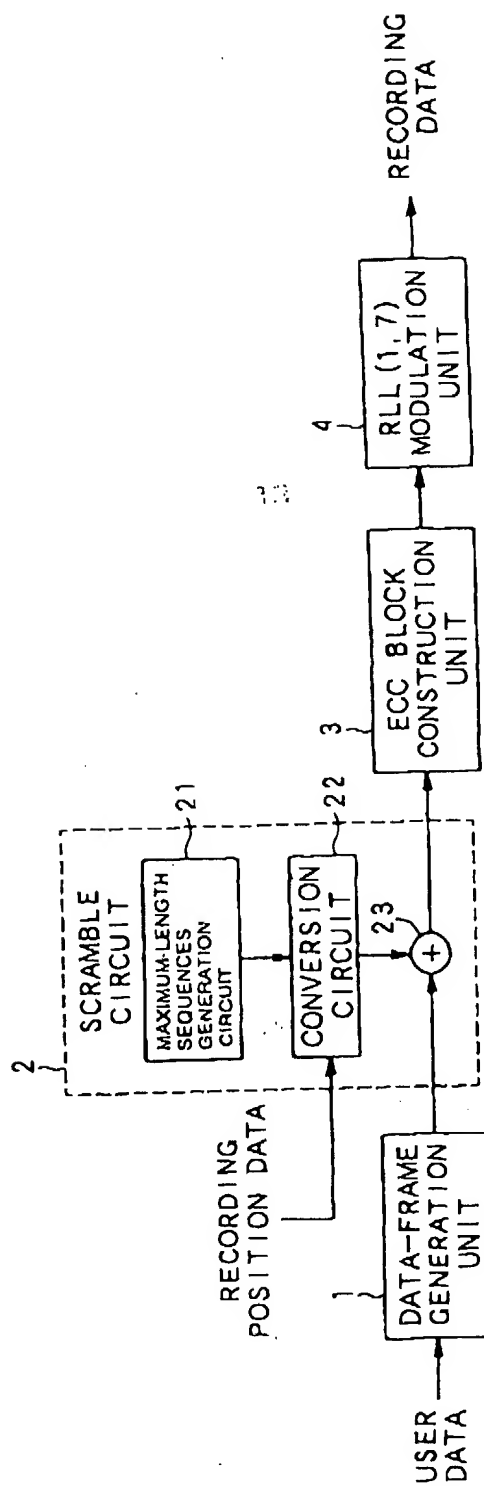

EP 1 211 682 A2

FIG. 2



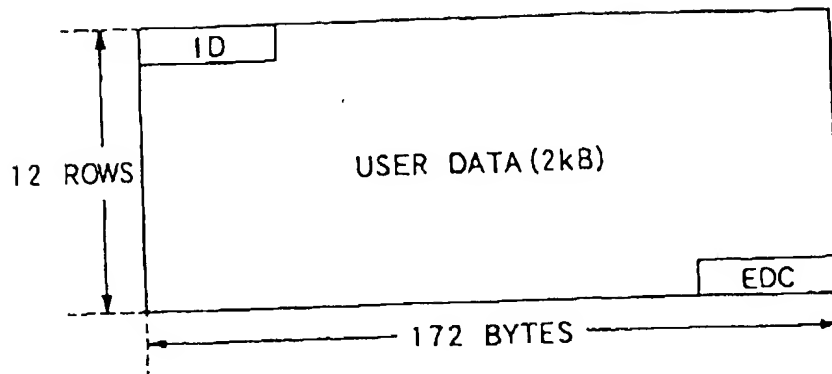


FIG. 3

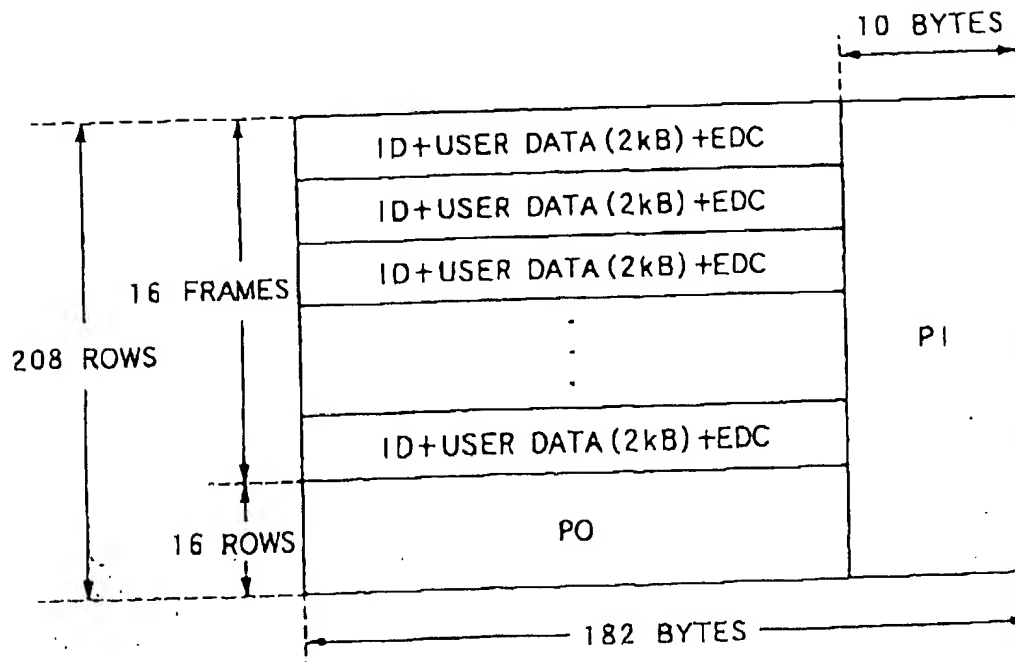

EP 1 211 682 A2

FIG. 4

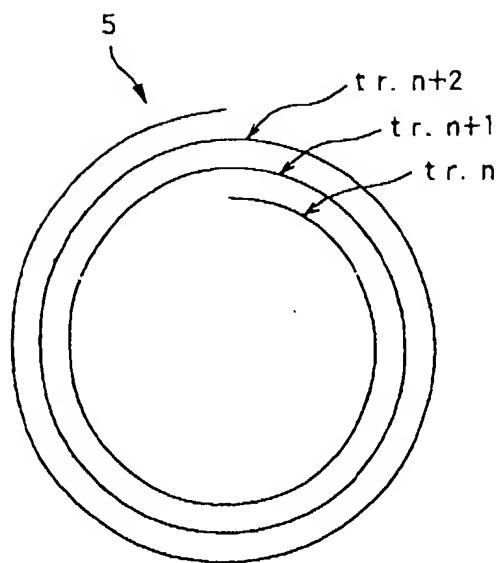

EP 1 211 682 A2

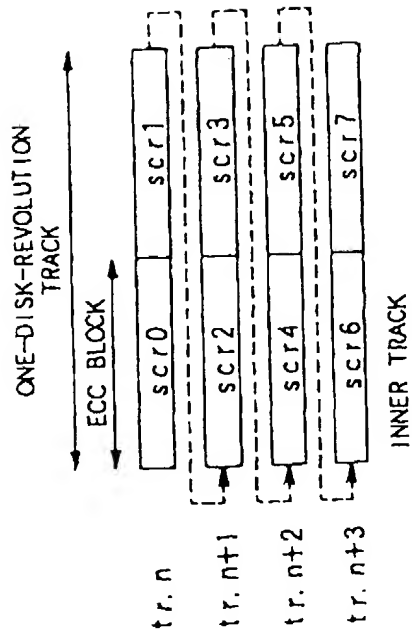


FIG. 5A


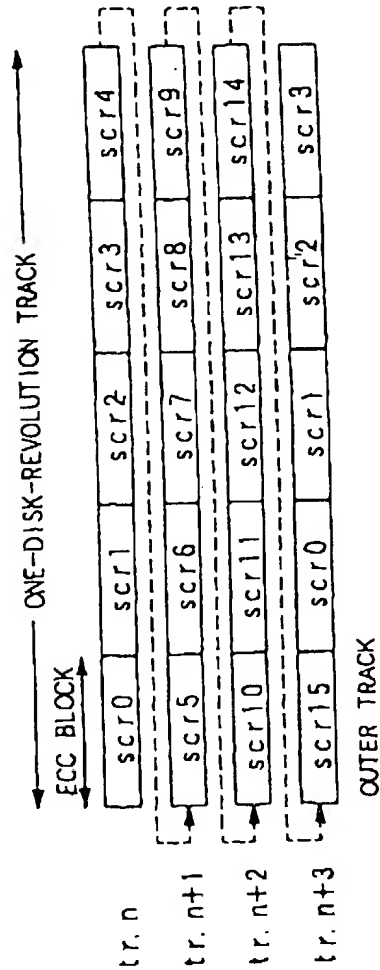


FIG. 5B

EP 1 211 682 A2


FIG. 6

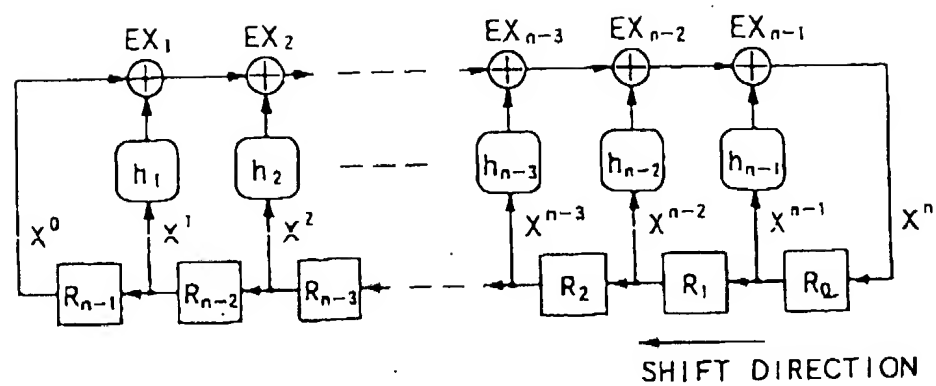

$$H(x) = x^n + h_{n-1} x^{n-1} + h_{n-2} x^{n-2} + h_{n-3} x^{n-3} + \dots + h_2 x^2 + h_1 x + 1$$

EP 1 211 682 A2

FIG. 7

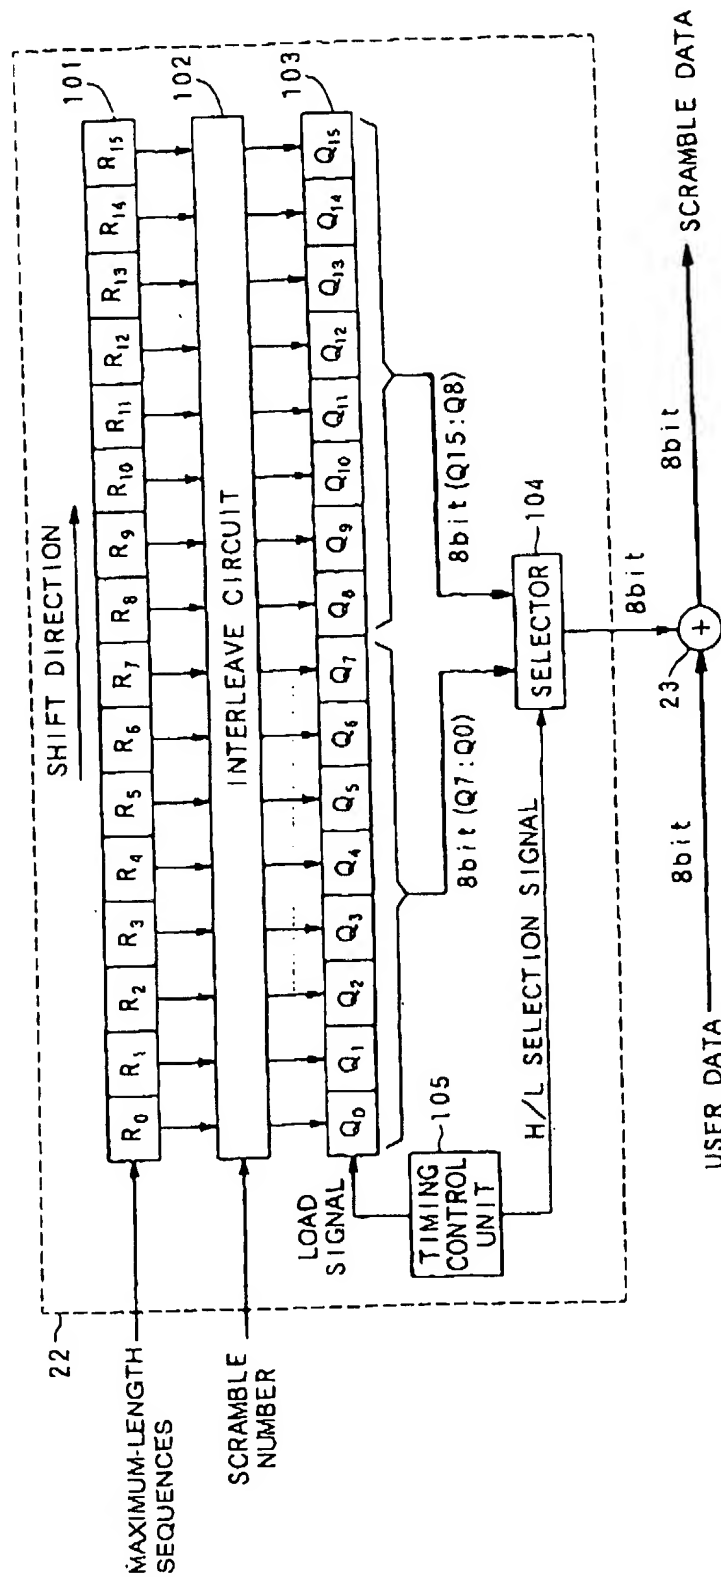


EP 1 211 682 A2

FIG. 8

SCRAMBLE NUMBER	R0	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0	Q0	Q1	Q3	Q6	Q10	Q15	Q5	Q12	Q4	Q13	Q7	Q2	Q14	Q11	Q9	Q8
1	Q1	Q4	Q10	Q3	Q15	Q14	Q0	Q5	Q13	Q8	Q6	Q7	Q11	Q2	Q12	Q9
2	Q2	Q7	Q1	Q0	Q4	Q13	Q11	Q14	Q6	Q3	Q5	Q12	Q8	Q9	Q15	Q10
3	Q3	Q10	Q8	Q13	Q9	Q12	Q6	Q7	Q15	Q14	Q4	Q1	Q5	Q0	Q2	Q11
4	Q4	Q13	Q15	Q10	Q14	Q11	Q1	Q0	Q8	Q9	Q3	Q6	Q2	Q7	Q5	Q12
5	Q5	Q0	Q6	Q7	Q3	Q10	Q12	Q9	Q1	Q4	Q2	Q11	Q15	Q14	Q8	Q13
6	Q6	Q3	Q13	Q4	Q8	Q9	Q7	Q2	Q10	Q15	Q1	Q0	Q12	Q5	Q11	Q14
7	Q7	Q6	Q4	Q1	Q13	Q8	Q2	Q11	Q3	Q10	Q0	Q5	Q9	Q12	Q14	Q15
8	Q8	Q9	Q11	Q14	Q2	Q7	Q13	Q4	Q12	Q5	Q15	Q10	Q6	Q3	Q1	Q0
9	Q9	Q12	Q2	Q11	Q7	Q6	Q8	Q13	Q5	Q0	Q14	Q15	Q3	Q10	Q4	Q1
10	Q10	Q15	Q9	Q8	Q12	Q5	Q3	Q6	Q14	Q11	Q13	Q4	Q0	Q1	Q7	Q2
11	Q11	Q2	Q0	Q5	Q1	Q4	Q14	Q15	Q7	Q6	Q12	Q9	Q13	Q8	Q10	Q3
12	Q12	Q5	Q7	Q2	Q6	Q3	Q9	Q8	Q0	Q1	Q11	Q14	Q10	Q15	Q13	Q4
13	Q13	Q8	Q14	Q15	Q11	Q2	Q4	Q1	Q9	Q12	Q10	Q3	Q7	Q6	Q0	Q5
14	Q14	Q11	Q5	Q12	Q0	Q1	Q15	Q10	Q2	Q7	Q9	Q8	Q4	Q13	Q3	Q6
15	Q15	Q14	Q12	Q9	Q5	Q0	Q10	Q3	Q11	Q2	Q8	Q13	Q1	Q4	Q6	Q7

EP 1 211 682 A2

FIG. 9

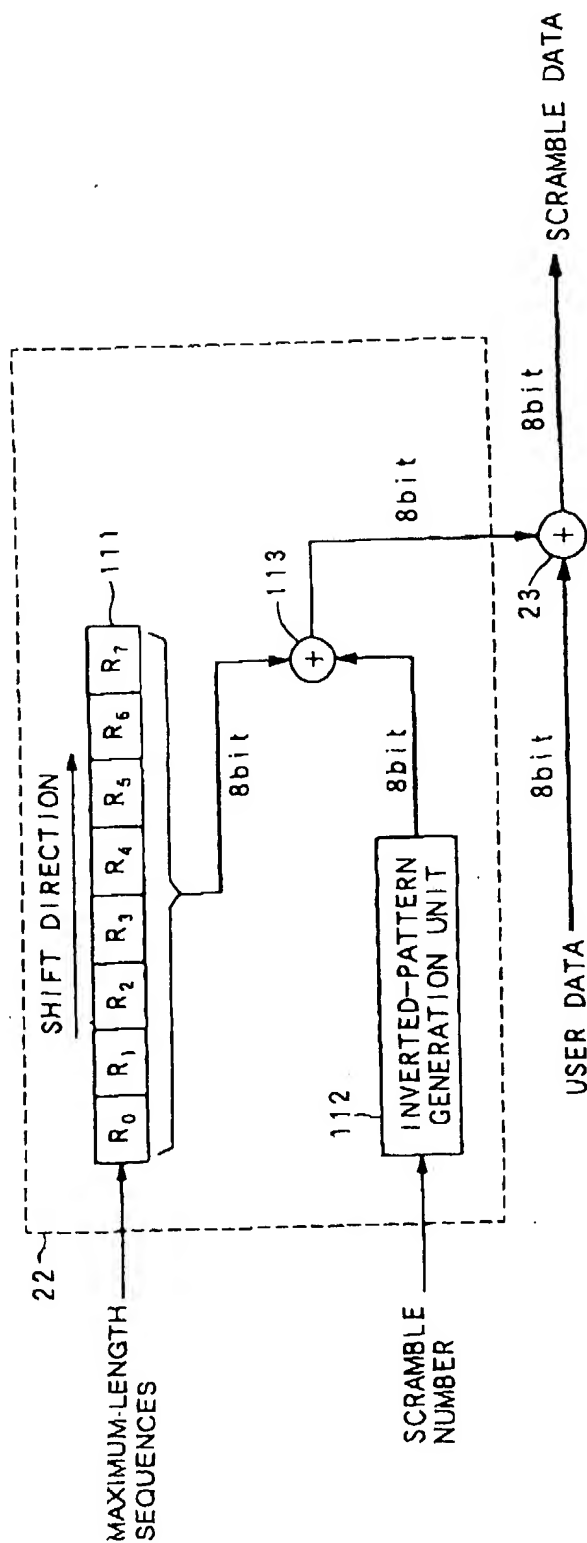


EP 1 211 682 A2

FIG.10

SCRAMBLE NUMBER	D7	D6	D5	D4	D3	D2	D1	D0
0	0	0	0	0	0	0	0	0
1	0	0	0	1	0	1	0	1
2	0	0	1	0	1	0	1	0
3	0	0	1	1	1	1	1	1
4	0	1	0	0	0	1	1	0
5	0	1	0	1	0	0	1	1
6	0	1	1	0	1	1	0	0
7	0	1	1	1	1	0	0	1
8	1	0	0	0	1	0	1	1
9	1	0	0	1	1	1	1	0
10	1	0	1	0	0	0	0	1
11	1	0	1	1	0	1	0	0
12	1	1	0	0	1	1	0	1
13	1	1	0	1	1	0	0	0
14	1	1	1	0	0	1	1	1
15	1	1	1	1	0	0	1	0


EP 1 211 682 A2

FIG. 11

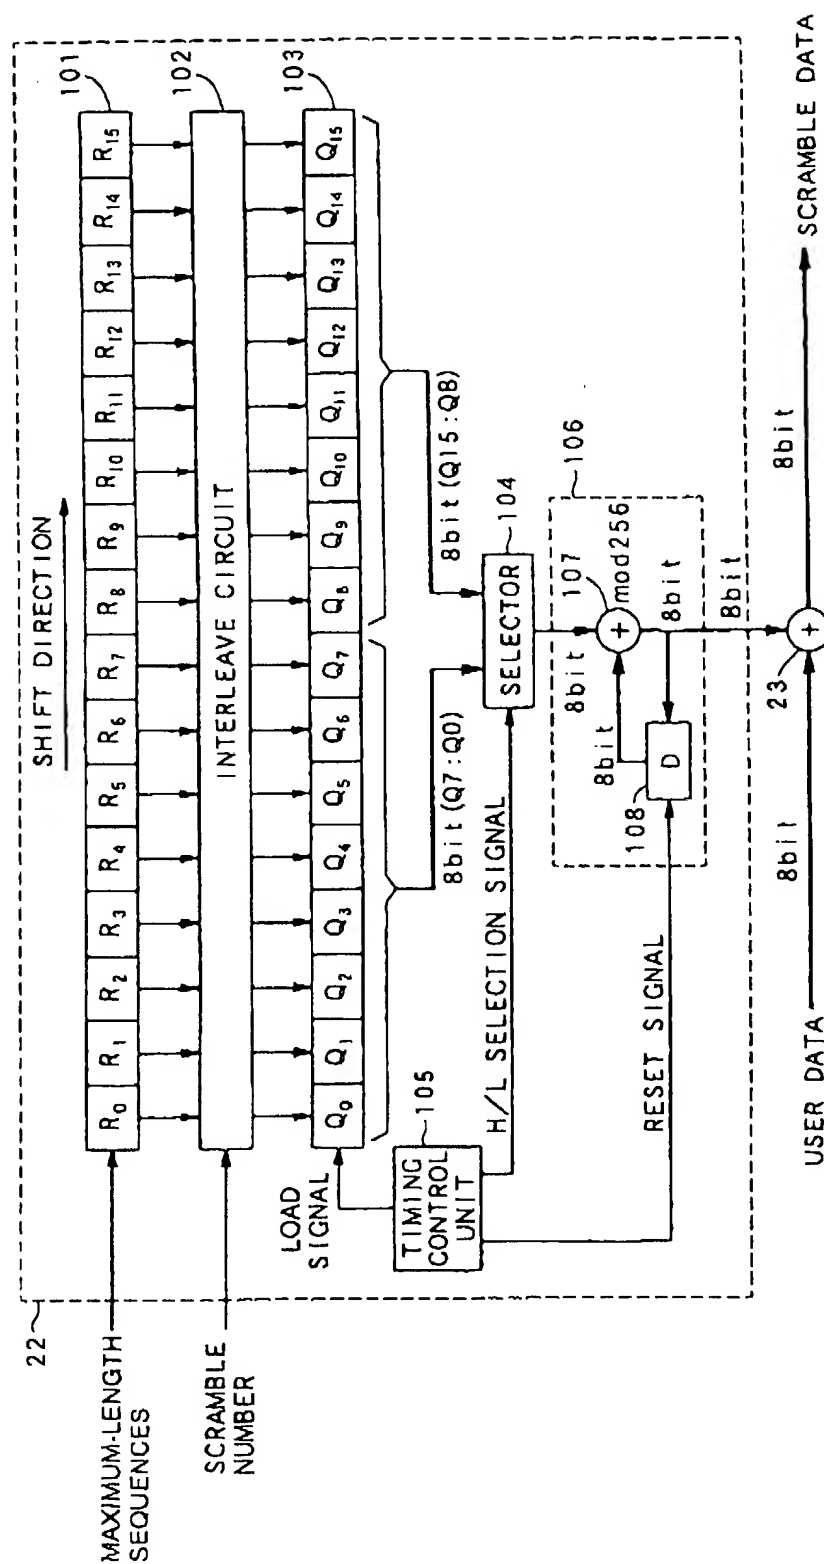


EP 1 211 682 A2

FIG. 12

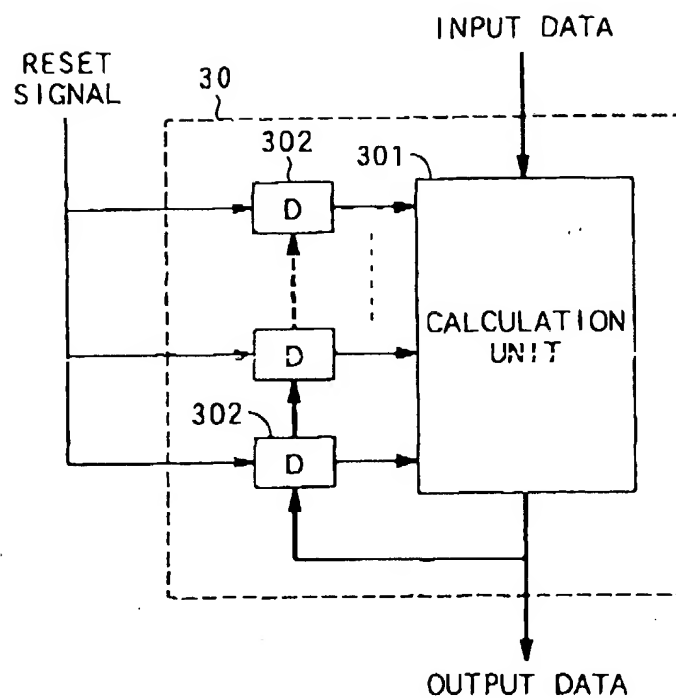


EP 1 211 682 A2


FIG. 13

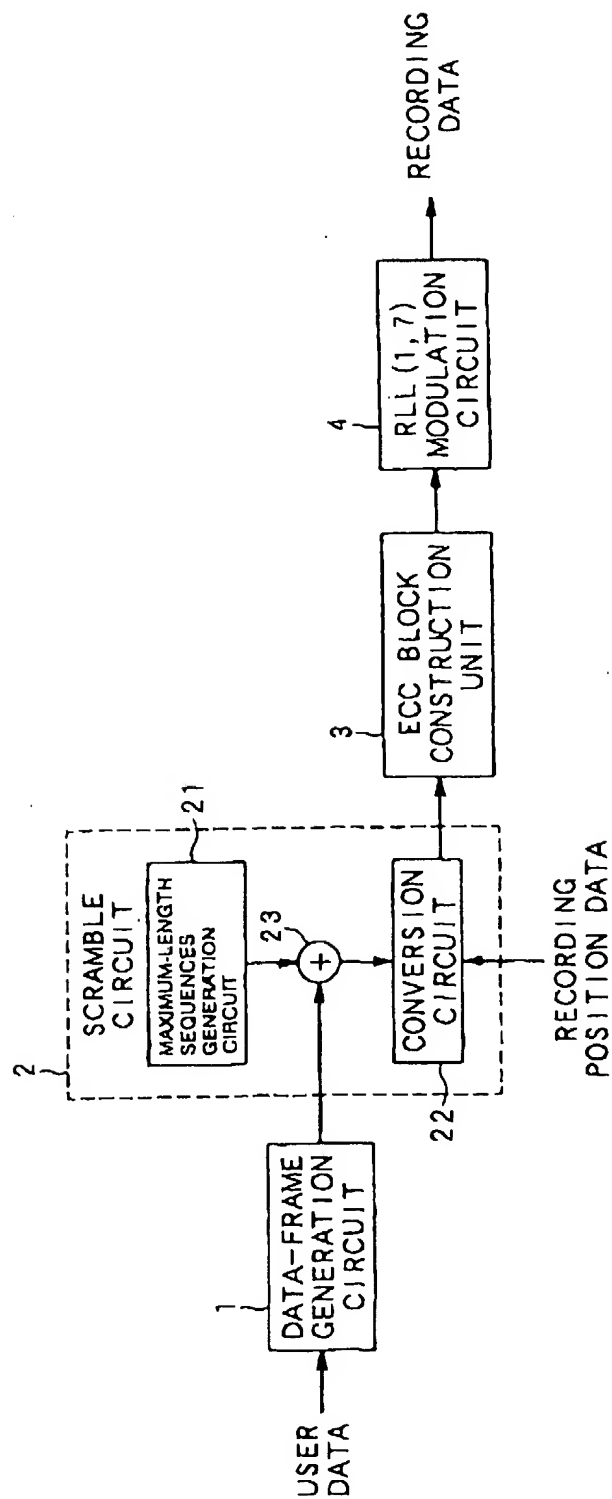

EP 1 211 682 A2

FIG. 14

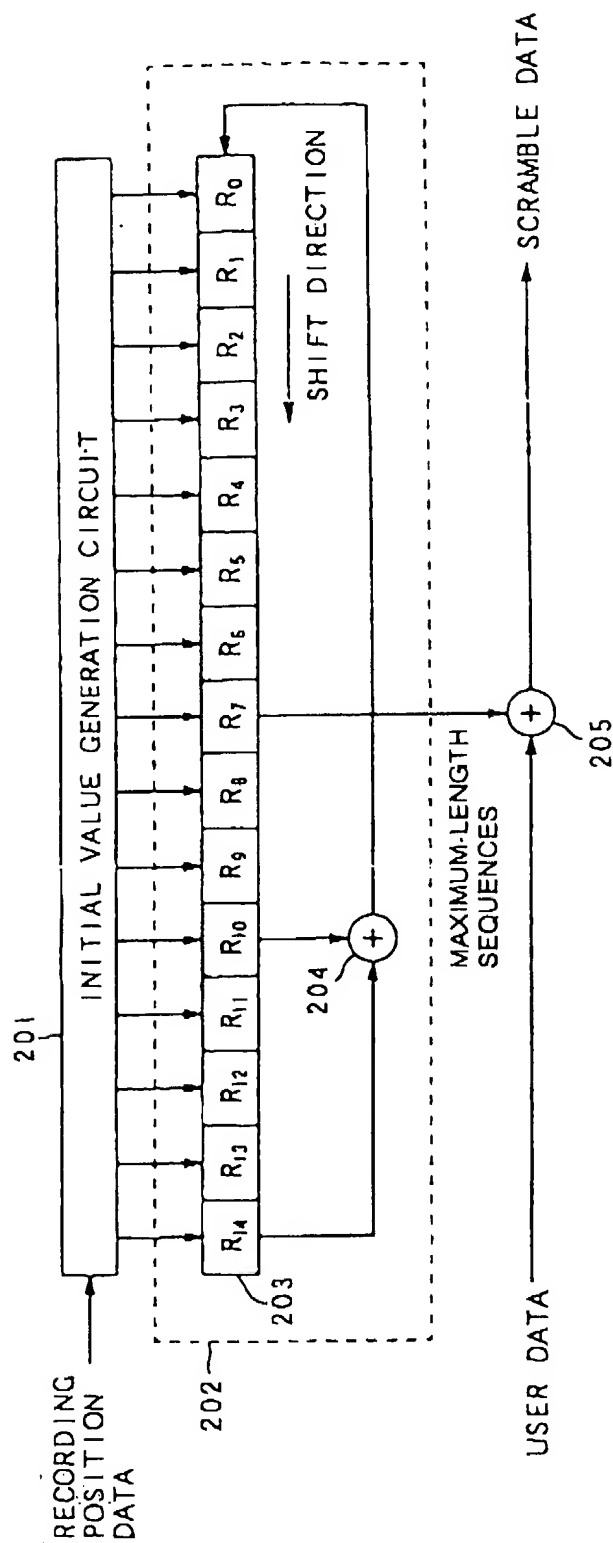



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 211 682 A3

(12)

EUROPEAN PATENT APPLICATION(88) Date of publication A3:
17.12.2003 Bulletin 2003/51(51) Int Cl.7: **G11B 20/14**, **G11B 20/10**,
G11B 27/30, **G11B 20/22**,
G11B 7/00(43) Date of publication A2:
05.06.2002 Bulletin 2002/23

(21) Application number: 01309755.5

(22) Date of filing: 20.11.2001

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:


- Kuribayashi, Hiroki, c/o Pioneer Corporation
Tsurugashima-shi, Saitama-ken (JP)
- Miyanabe, Shogo, c/o Pioneer Corporation
Tsurugashima-shi, Saitama-ken (JP)

(30) Priority: 28.11.2000 JP 2000361529

(74) Representative: Haley, Stephen et al
Gill Jennings & Every,
Broadgate House,
7 Eldon Street
London EC2M 7LH (GB)(71) Applicant: Pioneer Corporation
Tokyo-to (JP)(54) **Data recording / reproduction method and apparatus using random series for scrambling input data**

(57) When the present invention is applied to a DVD recording apparatus, a data-frame generation circuit(1) puts input user data into frames and a scramble circuit (2) scramble the data using M-series, then an ECC block construction unit(3) constructs ECC blocks and a RLL (1, 7) modulation unit(4) performs RLL modulation to generate recording data. In addition, in the scramble circuit(2), a M-series generation circuit(21) generates a

preset M-series and a conversion circuit(22) selectively converts this M-series to different random series based on recording position data for the position on the disk, then an EXOR circuit(23) takes the exclusive OR of the input data and the converted random series to scramble the input data, making it possible to perform highly reliable scrambling with little correlation between pairs of adjacent tracks on the disk.

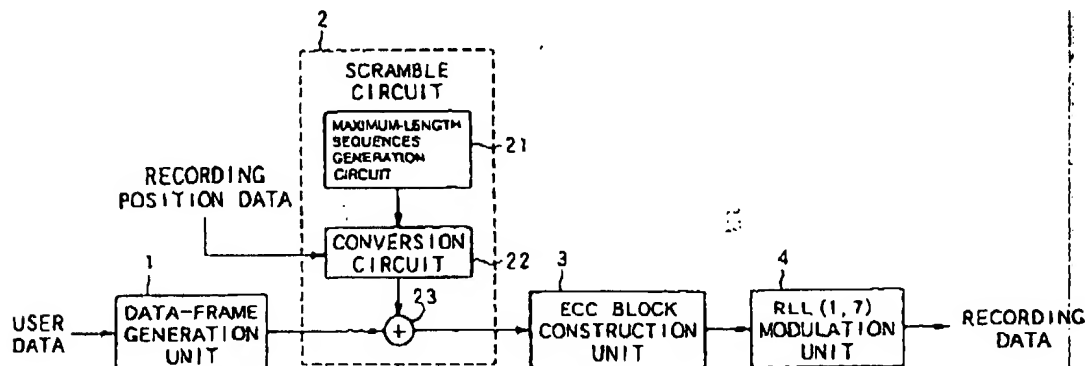FIG. 1

EP 1 211 682 A3

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 01 30 9755

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 843 445 A (FUJITSU LTD) 20 May 1998 (1998-05-20) * figures 6-8 * * column 6, line 1 - line 25 * * column 7, line 13 - line 43 * * column 8, line 21 - column 9, line 17 * * column 10, line 39 - line 43 *	1,6,7, 12-14	G11B20/14 G11B20/10 G11B27/30 G11B20/22 G11B7/00
A	---	2-5,8-11	
X	US 5 949 750 A (MATSUI KAZUNARI) 7 September 1999 (1999-09-07) * column 4, line 32 - line 48 * * column 5, line 53 - column 6, line 40 * * column 7, line 63 - column 8, line 8 * * column 9, line 42 - column 10, line 4 *	1,6,7, 12-14	
A	US 5 566 099 A (SHIMADA MICHIO) 15 October 1996 (1996-10-15) ---		
A	US 5 867 475 A (HIRAYAMA KOICHI ET AL) 2 February 1999 (1999-02-02) * figures 6-8, 12, 13 * * column 5, line 3 - line 5 * * column 5, line 33 - line 37 * * column 8, line 10 - column 9, line 5 * * column 9, line 45 - column 14, line 59 * * column 16, line 45 - column 17, line 24 * * column 19, line 49 - line 60 *	1,6,7, 12-14	TECHNICAL FIELDS SEARCHED (Int.Cl.7) G11B H04N G06F
A	PATENT ABSTRACTS OF JAPAN vol. 014, no. 321 (P-1074), 10 July 1990 (1990-07-10) & JP 02 103780 A (SONY CORP), 16 April 1990 (1990-04-16) * abstract *	1,3,7,9, 13,14	
-/-			
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 28 October 2003	Examiner Ogor, M
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background D : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document added for other reasons & : member of the same patent family, corresponding document			

EP FORM 1603 (3-02) (P)

EP 1 211 682 A3

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 30 9755

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	EP 0 756 279 A (SONY CORP) 29 January 1997 (1997-01-29) * figures 4-6 * * column 6, line 18 - column 7, line 8 * -----	1,6,7, 12-14	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 28 October 2003	Examiner Ogor, M
CATEGORY OF CITED DOCUMENTS		T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &: member of the same patent family, corresponding document	
X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document			

EPO FORM 1503 (01/02/99) (P.1/1)

EP 1 211 682 A3

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 9755

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-10-2003

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0843445	A	20-05-1998	JP	10144000 A	29-05-1998
			EP	0843445 A2	20-05-1998
			KR	269418 B1	16-10-2000
			US	5987630 A	16-11-1999
US 5949750	A	07-09-1999	JP	2927163 B2	28-07-1999
			JP	7161139 A	23-06-1995
			US	5771215 A	23-06-1998
			DE	69425543 D1	21-09-2000
			DE	69425543 T2	04-01-2001
			DE	69429837 D1	21-03-2002
			DE	69429837 T2	07-11-2002
			EP	1033703 A2	06-09-2000
			EP	0655739 A2	31-05-1995
			US	5862115 A	19-01-1999
			US	5661707 A	26-08-1997
US 5566099	A	15-10-1996	JP	2541480 B2	09-10-1996
			JP	7104976 A	21-04-1995
US 5867475	A	02-02-1999	AT	206233 T	15-10-2001
			CA	2217005 A1	17-10-1996
			DE	69615548 D1	31-10-2001
			DE	69615548 T2	29-05-2002
			EP	0820629 A1	28-01-1998
			HK	1008610 A1	12-04-2002
			WO	9632716 A1	17-10-1996
			JP	11505358 T	18-05-1999
			US	5732066 A	24-03-1998
JP 02103780	A	16-04-1990	NONE		
EP 0756279	A	29-01-1997	DE	69618101 D1	31-01-2002
			DE	69618101 T2	22-08-2002
			EP	0756279 A2	29-01-1997
			JP	9097216 A	08-04-1997
			US	6516064 B1	04-02-2003

EPO FORU 20459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.